
ENOLIGHT
BEYOND LIGHT

SURFACE MOUNT
RUNNER LINEAR INDIRECT WALL SCONCE

HORIZON SERIES

HRZ6026F

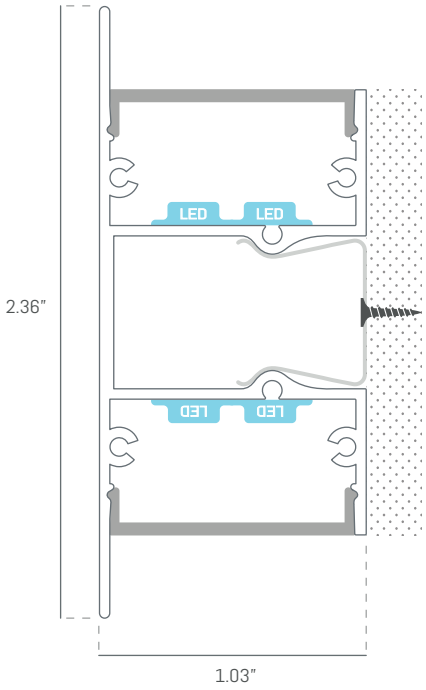

HRZ6026F is a surface mount runner wall sconce made of extruded aluminum housing with a protective black sand texture powder coat matte finish, capped with flat frosted lenses.

This linear LED luminaire is designed to produce an indirect uniform wall-wash illumination in indoor and outdoor wall applications. HRZ6026F comes in variable lengths up to 18 feet and can be secured vertically or horizontally on a surface using mounting clips.

Horizon series are complemented with dimmable, dot-free LED, energy-efficient, producing high color rendering index lighting. The bright white LED light source with CCT options from 2200K to 6000K provides the environment with desired lighting that fits the design concept.

The lighting system can be conveniently controlled with wall remote, hand remote, and smart app options. HRZ6026F is a perfect fit for use in residential and commercial spaces for wet and dry applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

CHARACTERISTICS

SPECIFICATIONS

ELECTRICAL

Input
24 V - 10 W/ft - 32 W/m

Power Supply
Class 2 Dimmable 20KHZ
Lutron Hi-lume 0.1%
Lutron 3-wire 100%-1%

Operating temp
- 40°F to + 113°F
- 40°C to + 45°C

Certification
U.S./Canada UL approved
Type IC Recessed

c UL US LISTED E505874

CONTROL

Options
Combination of wireless wall touch keys, portable remotes, and mobile App

Range
Wireless controlling transmits RF in 30m range

Multi-zone
Individual and collective zone options for color and brightness control

Dimming
Brightness, color tuning, & light mode with memory saving options

PHYSICAL

Dimension
2.36 in x 1.03 in - 60x26 mm
Up to 18 ft (5.5 m) length *
0.32 lbs/ft - 0.48 kg/m

Finish
Silver anodized aluminium, black, or white finish *

Field
Wet and dry applications

Mounting
Surface mounting using screw-in clips

LIGHT

LED type
White, tunable white, RGB Circadian BIOS SkyBlue

CCT
3000K 3500K 4000K
4500K 5000K 5500K *

CRI
High CRI up to 97 *

Brighness
800 Lm/ft - 2800 Lm/m *

Life time
50,000 hours

Warranty
5 years warranty

* AVAILABLE FOR CUSTOM APPLICATIONS. VISIT ENOLIGHT.COM OR CONTACT SALES@ENOLIGHT.COM +1 833 366 5444 FOR FURTHER DETAILS.

DISCLAIMER: THE ACTUAL PRODUCT MAY VARY FROM THE IMAGES SHOWN. DUE TO DIFFERENCES IN MONITORS, COLOURS OF PRODUCTS MAY ALSO APPEAR DIFFERENT TO THOSE SHOWN. SPECIFICATION AND ILLUSTRATIONS PROVIDED FOR EACH PRODUCT IS TO BE USED AS A GENERAL GUIDE ONLY.
COPYRIGHT © 2017-2019 ENOLIGHT LTD. ALL RIGHTS RESERVED.