
ENOLIGHT
BEYOND LIGHT

VIVID SERIES

PENDANT MOUNT
4 INCH WIDE LENS EXTENDABLE LINEAR LIGHT

VIV10270F

CHARACTERISTICS

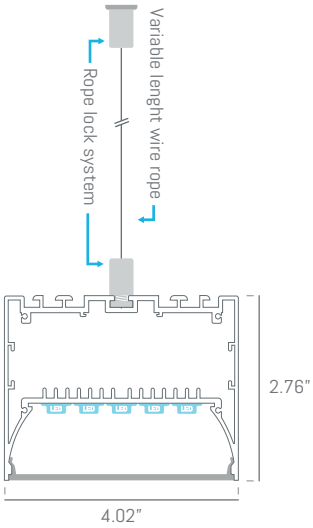


VIV10270F is a pendant linear light made of extruded aluminum housing with a protective silver anodized finish, capped with a flush frosted lens.

This linear LED luminaire is designed to produce a bright uniform distribution of diffused light in pendant or surface mounted applications. VIV10270F is secured using suspension wire ropes and comes in variable lengths up to 8 feet.*

Vivid series can be conveniently controlled with multi-zone wall touch keypad and smart mobile app options. VIV10270F is a perfect fit for use in residential and commercial spaces for damp and dry applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

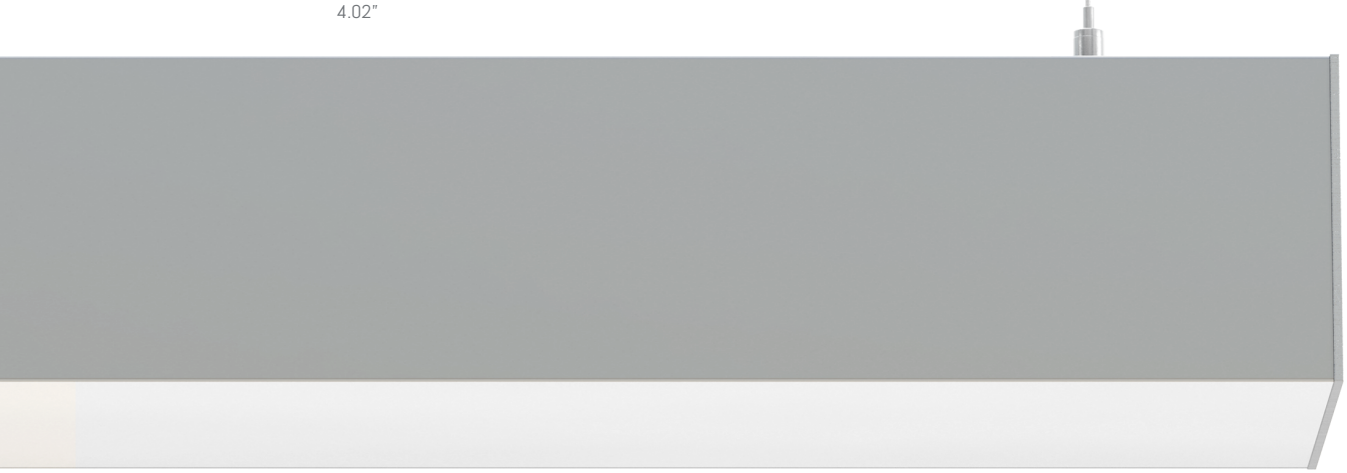

SPECIFICATIONS

ELECTRICAL

WATTAGE
15W/ft, 20W/ft, 25W/ft
24 Volt DC input

OPERATING TEMP
-31°F to +113°F
-35°C to +45°C

CERTIFICATION
USA and Canada UL safety approved

c UL US LISTED E505874

CONTROL

DIMMING MODE
Class 2 Flicker-Free Dimmable, DMX Tunable, Non-Dimmable

WALL KEYPAD
Dimmer switch, Multi-zone DMX dim and tuning touch key with smart mobile App

PHYSICAL

DIMENSION
4.02 in x 2.76 in, 102x70mm
Up to 8ft length, 1.41 lb/ft

FINISH
Silver anodized, Black matte, White matte *

FIELD
Suspended in damp or dry locations

LIGHT

LED TYPE
Single white, Tunable white, RGBW, Circadian Rhythm

EFFICACY
100 Lm/W, Max 2000 Lm/ft *

LIFESPAN
50,000 hours

WARRANTY
5 years warranty

VIV10270F	8F	1600	SA	30K	JT	F2
4" Wide Lens Pendant Linear Light	**1FT-8FT** 1' to 8' Custom length up to 8'	**1200** 1200lm/ft 15W/ft **1600** 1600lm/ft 20W/ft **2000** 2000lm/ft 25W/ft	**SA** Silver Anodized **BM** Black Matte **WM** White Matte	**27K** 2700K Incandescent 90CRI **30K** 3000K Warm Halogen 90CRI **35K** 3500K Neutral White 90CRI **40K** 4000K Cool White 90CRI **50K** 5000K Daylight White 90CRI **27T** 2700K-6500 Tunable 90CRI **RGBW** RGB and 6500K White 90CRI **CR** Circadian Rhythm 97R9 98CRI	**JT** Triac Phase Dimming **JX** DMX Multi-Channel **JN** Non-Dimmable **JD** DALI Dimmable	**F2** Dry Field **F3** Damp Field

* Available for custom applications. Visit enolight.com or contact sales@enolight.com for further details.

Disclaimer: The actual product may vary from the images shown. Due to differences in monitors, colours of products may also appear different to those shown. Specification and illustrations provided for each product is to be used as a general guide only. Copyright © EnoLight Ltd. All Rights Reserved.