
ENOLIGHT
BEYOND LIGHT

PENDANT MOUNT
ULTRA THIN LIGHT BAR WITH SQUARE FROSTED LENS

VIVID SERIES

# VIV1603S

CHARACTERISTICS

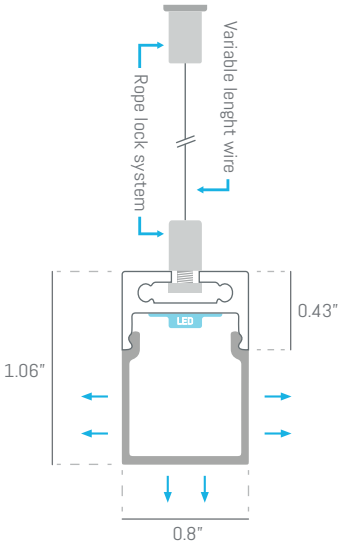



VIV1603S is a pendant linear profile made of extruded aluminum housing with a protective silver anodized finish, capped with a square frosted lens that surrounds the LED housing.

This linear LED luminaire is designed to produce a uniform distribution of diffused light in pendant applications. VIV1603S has an ultra-thin construct and may be secured using suspension wire ropes. This channel comes in variable lengths up to 8 feet.*

Vivid series can be conveniently controlled with multi-zone wall touch keypad and smart mobile app options. VIV1603S is a perfect fit for use in residential and commercial spaces for damp and dry applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

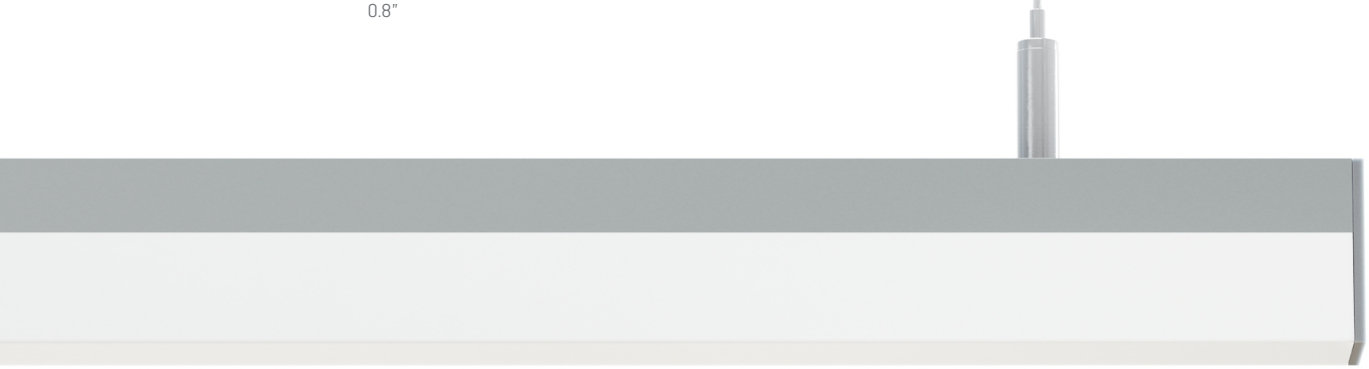

SPECIFICATIONS

## ELECTRICAL

### WATTAGE
2.4W/ft, 5W/ft
24 Volt DC input

### OPERATING TEMP
-31°F to +113°F
-35°C to +45°C

### CERTIFICATION
USA and Canada UL safety approved

c UL US LISTED E505874

## CONTROL

### DIMMING MODE
Class 2 Flicker-Free Dimmable, DMX Tunable, Non-Dimmable

### WALL KEYPAD
Dimmer switch, Multi-zone DMX dim and tuning touch key with smart mobile App

## PHYSICAL

### DIMENSION
0.8 in x 1.06 in, 20x27mm
Up to 8ft length, 0.19 lb/ft

### FINISH
Silver anodized, Black matte, White matte *

### FIELD
Suspended in damp or dry locations

## LIGHT

### LED TYPE
Single white, Tunable white, RGBW, Circadian Rhythm

### EFFICACY
100 Lm/W, Max 400 Lm/ft *

### LIFESPAN
50,000 hours

### WARRANTY
5 years warranty

| VIV1603S | 8F | 400 | SA | 30K | JT | F2 |
|---|---|---|---|---|---|---|
| Ultra Thin Pendant with Square Frosted Lens | **1FT-8FT** 1' to 8'<br>Custom length up to 8' | **200** 200lm/ft 2.4W/ft<br>**400** 400lm/ft 5W/ft | **SA** Silver Anodized<br>**BM** Black Matte<br>**WM** White Matte | **27K** 2700K Incandescent 90CRI<br>**30K** 3000K Warm Halogen 90CRI<br>**35K** 3500K Neutral White 90CRI<br>**40K** 4000K Cool White 90CRI<br>**50K** 5000K Daylight White 90CRI<br>**27T** 2700K-6500 Tunable 90CRI<br>**RGBW** RGB and 6500K White 90CRI<br>**CR** Circadian Rhythm 97R9 98CRI | **JT** Triac Phase Dimming<br>**JX** DMX Multi-Channel<br>**JN** Non-Dimmable<br>**JD** DALI Dimmable | **F2** Dry Field<br>**F3** Damp Field |

* Available for custom applications. Visit enolight.com or contact sales@enolight.com for further details.

Disclaimer: The actual product may vary from the images shown. Due to differences in monitors, colours of products may also appear different to those shown. Specification and illustrations provided for each product is to be used as a general guide only. Copyright © EnoLight Ltd. All Rights Reserved.