
ENOLIGHT
BEYOND LIGHT

PENDANT SURFACE
1.5 INCH WIDE LENS LINEAR LIGHT WITH AN INDIRECT UPLIGHT

VIVID SERIES

VIV4160F

CHARACTERISTICS

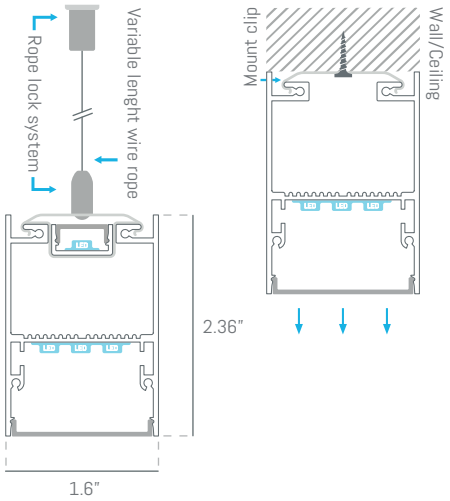


VIV4160F is a pendant linear light made of extruded aluminum housing with a protective black powder coat matte finish, capped with flush frosted lenses.

This linear light is designed with two independently-controlled lighting sources projecting light uniformly in both upward and downward directions. VIV4160F is secured using suspension wire ropes and comes in variable lengths up to 18 feet.

Vivid series can be conveniently controlled with multi-zone wall touch keypad and smart mobile app options. VIV4160F is a perfect fit for use in residential and commercial spaces for damp and dry applications to produce ambient or decorative illumination.

EnoLight lighting solutions are designed and manufactured in Canada to the highest industry standards with 5 years warranty.

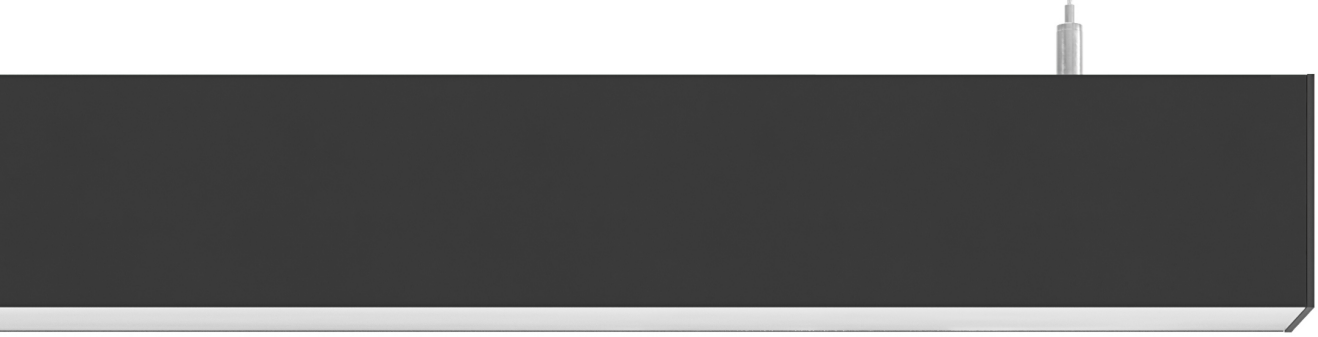

SPECIFICATIONS

ELECTRICAL

WATTAGE
10W/ft, 15W/ft, 20W/ft
24 Volt DC input

OPERATING TEMP
-31°F to +113°F
-35°C to +45°C

CERTIFICATION
USA and Canada UL safety approved

c UL US LISTED E505874

CONTROL

DIMMING MODE
Class 2 Flicker-Free Dimmable, DMX Tunable, Non-Dimmable

WALL KEYPAD
Dimmer switch, Multi-zone DMX dim and tuning touch key with smart mobile App

PHYSICAL

DIMENSION
1.6 in x 2.36 in, 41x60mm
Up to 18ft length, 0.56 lb/ft

FINISH
Black powder coat matte,
White powder coat matte *

FIELD
Suspended in damp or dry locations



LIGHT

LED TYPE
Single white, Tunable white, RGBW, Circadian Rhythm

EFFICACY
100 Lm/W, Max 1600 Lm/ft *

LIFESPAN
50,000 hours

WARRANTY
5 years warranty

VIV4160F	16F	1200	BM	30K	JT	F2
Pendant Light with an Indirect Uplight	**1FT-18FT** 1' to 18' Custom length up to 18'	**800** 800lm/ft 10W/ft **1200** 1200lm/ft 15W/ft **1600** 1600lm/ft 20W/ft	**BM** Black Matte **WM** White Matte	**27K** 2700K Incandescent 90CRI **30K** 3000K Warm Halogen 90CRI **35K** 3500K Neutral White 90CRI **40K** 4000K Cool White 90CRI **50K** 5000K Daylight White 90CRI **27T** 2700K-6500 Tunable 90CRI **RGBW** RGB and 6500K White 90CRI **CR** Circadian Rhythm 97R9 98CRI	**JT** Triac Phase Dimming **JX** DMX Multi-Channel **JN** Non-Dimmable **JD** DALI Dimmable	**F2** Dry Field **F3** Damp Field

* Available for custom applications. Visit enolight.com or contact sales@enolight.com for further details.

Disclaimer: The actual product may vary from the images shown. Due to differences in monitors, colours of products may also appear different to those shown. Specification and illustrations provided for each product is to be used as a general guide only. Copyright © EnoLight Ltd. All Rights Reserved.